
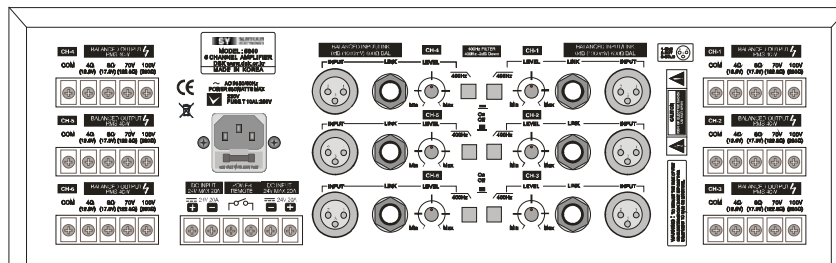


# 6 CHANNEL PA POWER AMPLIFIER

MC5630/5650

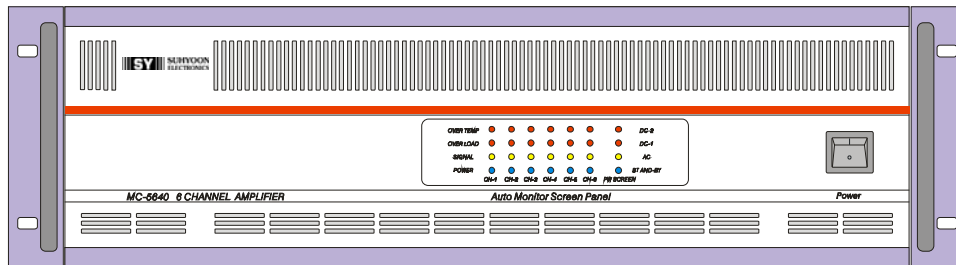

[Zoom](#)

[Print](#)

[Leaflet](#)

[Drawing](#)

[Manual](#)

## Features

- \* Full protection for product reliability
  - Overload and speaker line short limiter circuit
  - Over current limiter circuit
  - Over heating protection
- \* FAN by temperature of heat sink
- \* 400Hz filter to improve clearance of sound quality for matching of resonant sound of inner side
- \* 25V, 35V, 50V, 70V and 100V outputs for matching of speaker impedance (optional)
- \* Soft start circuit for AC power on
- \* Output LED indicator
- \* Input gain volume control
- \* XLR and screw terminals for signal input to make an easy installation
- \* Designed for operation either AC mains

### Technical Specifications

AMPLIFIER		MC-5630		MC-5650	
Rated Output (RMS)		20W x 6 CH		50W x 6 CH	
Input Sensitivity / Impedance		1000mV (0dBm) 66K ohm BAL			
Input Filter (H.P.F)		440Hz / -3dB			
Output Level / Impedance	Low IMP	8 Ohm/17.9V		8 Ohm/12.6V	
	High IMP	Europe (Ohm)		America (Ohm)	
		50V	100V	25V	70V
	MC-5620	125 Ohm	500 Ohm	31.2 Ohm	245 Ohm
	MC-5650	62.5 Ohm	250 Ohm	15.6 Ohm	122.5 Ohm
Frequency Response		Less than -3dB (35Hz ~ 20KHz)			
Signal to Noise Ratio		More then 100dB ("A" weight)			
T.H.D (at 1KHz Output )		Less than 0.5%			
High Pass Filter (-3dB)		350Hz			
Efficiency		80%			
<b>GENERAL</b>					
Power Consumption		360W		750W	
Power Source		110-240VAC 50/60Hz & 24VDC			
Weight (kg/lbs)		14/30.8		18/39.6	
Dimensions (W x H x D) mm/inch		482 x 132 x 380 & 19" x 5.2" x 15"			

**OFFICE & FACTORY** : 229-10 Beun-Dong, Kangbook-ku, Seoul, Korea.

**TEL:** 822-945-0521/3, **FAX:** 822-945-0524, **www:** suhyoon.co.kr **E-MAIL:** suhyoon@suhyoon.co.kr